

CAT. 6 SF/UTP 26AWG, 250MHz, LSZH

PGS-FL66-51ST341X1

STANDARD COMPLIANCE

UL LISTED: UL444

ISO/IEC 11801:2002

IEC 61156-6 FOR PATCH CABLE


IEC60332-1-2 FLAME TEST

RoHS COMPLIANCE FOR THE REQUIREMENT OF EUROPEAN UNION ISSUED DIRECTIVE 2011/65/EU

UL VERIFIED TO IEC 62821-1 LSHF(Low-Smoke-Halogen-Free) JACKET



SECTION PLANS

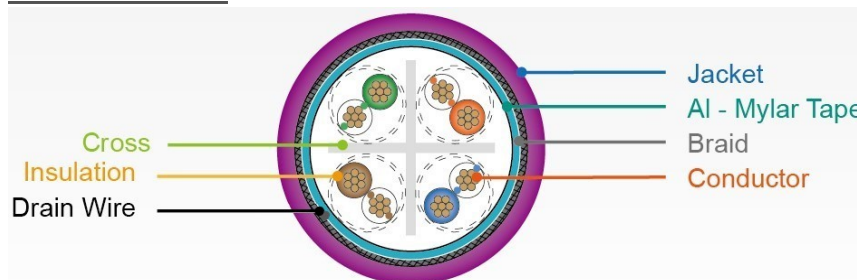

CONSTRUCTION

		CATEGORY 6 SF/UTP STRANDED
CONDUCTOR	MATERIAL & SIZE	BARE COPPER, 26AWG
	DIAMETER	7/0.162mm +/-0.003mm
INSULATION	MATERIAL	HDPE(CMI-75E)
	THICKNESS	MIN. AVERAGE THICKNESS: 0.25mm MIN.THICKNESS: 0.20mm
	COLOR CODE	Pair 1: Blue & White/Blue Pair 3: Green & White/Green Pair 2: Orange & White/Orange Pair 4: Brown & White/Brown
	DIAMETER	0.91 +/-0.03mm
	TENSILE STRENGTH	16.5 MPa / 2400 PSI
	ULTIMATE ELONGATION	≥300%
JACKET	MATERIAL	CMX-LSHF Compound
	THICKNESS	MIN. AVERAGE THICKNESS: 0.585mm MIN.THICKNESS: 0.485mm
	OVERALL DIAMETER	6.8mm +/-0.3mm
	MINIMUM BENDING RADIUS	≥ 4TIMES OF OVERALL DIAMETER
	MAXIMUM PULLING TENSION	MAX. 110N
	TENSILE STRENGTH	8.3 MPa / 1200 PSI
	ULTIMATE ELONGATION	≥100%
SHIELDING	MATERIAL	Aluminum/Mylar Tape ; 60% Coverage Tinned Copper Braid
DRAIN WIRE	MATERIAL	Tinned Copper

ELECTRIC REQUIREMENT

		CATEGORY 6 SF/UTP STRANDED
CHARACTERISTIC IMPEDENCE(Zo)		85 ~ 115Ω (1 ~ 250MHz)
DC. RESISTANCE CAPACITANCE UNBALANCE		5%
PAIR-TO-GROUND CAPACITANCE UNBALANCE		330 pF/100M MAX.
CONDUCTOR RESISTANCE		14.0Ω/ 100M 20°C MAX.
MUTUAL CAPACITANCE		5600 pF/100M MAX.
SPARK TEST		2.5KV
NOMINAL VELOCITY OF PROPAGATION (N.V.P.)		76%

CAT. 6 SF/UTP 26AWG, 250MHz, LSZH

PGS-FL66-51ST341X1

ENVIRONMENTAL CONDITION & USAGE

TEMPERATURE RANGE	SHIPPING & STORAGE	-20°C to 75°C
	INSTALLATION	0°C to 50°C
	OPERATION	-10°C to 60°C

TRANSMISSION REQUIREMENTS

FREQUENCY MHZ	ATT. STRANDED	PR-PR NEXT	PS NEXT	PROP. DELAY NS	DELAY SKEW NS	RETURN LOSS	PR-PR ELFEXT	PS ELFEXT
*1	3.8	74.3	72.3	538.5	45	20.0	67.8	64.8
*10	10.9	59.3	57.3	545.0	45	25.0	47.8	44.8
20	13.8	54.8	52.8	539.9	45	25.0	41.8	38.8
31.25	17.7	51.9	49.9	540.2	45	23.3	37.9	34.9
62.5	25.6	47.4	45.4	540.8	45	20.7	31.9	28.9
100	35.0	44.3	42.3	541.4	45	19.0	27.8	24.8
200	40.9	39.8	37.8	542.5	45	16.4	21.8	18.8
250	48.5	38.3	36.3	543.0	45	15.6	19.8	16.8

Values show on tables above are for reference purpose only.

MARKING & PACKAGING

PACKAGING	FT/ BOX	FT/ BOX
APPROX. WEIGHT(kg)		
DIMENSION(mm)		
PACKAGES per PALLET		
MARKING	PGS-FL66-51ST341X1 TYPE CMX-LSHF 4PR 26AWG PATCH CABLE 75°C (UL) E495789 P ISO/IEC 11801 SF/UTP CAT.6 STRANDED PT pactech BATCH NO. RoHS	